

Explosion Proof Non Contact Safety Interlock Switches




Tel +31(0)85-27 36 750
Fax +31(0)85-27 36 760
Web www.inrato.com

CM1-Ex STAINLESS STEEL 316

II 2G Ex mb IIC T6 Gb


II 2D Ex mb IIIC T80 Db IP67*

Zones 1, 21, 2, 22 Gas and Dust

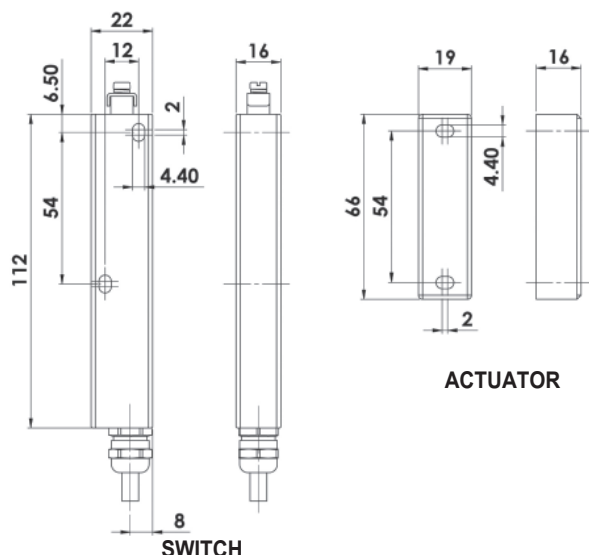

ACTUATOR

SWITCH

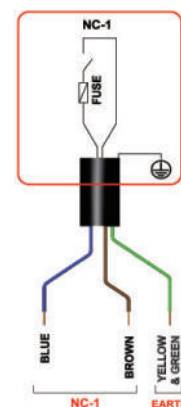


SALES NUMBER	TYPE ZONES 1,21,2,22	BODY HOUSING	CABLE LENGTH 6mm OD	CIRCUITS	ELECTRICAL RATING NORMALLY CLOSED CIRCUITS (Actuator Present) NC
901101	CM1-Ex	S/Steel	5M	1NC	230Vac/24Vdc 2A Max.
901102	CM1-Ex	S/Steel	10M	1NC	INTERNALLY FUSED

CM2-Ex STAINLESS STEEL 316

II 2G Ex mb IIC T6 Gb


II 2D Ex mb IIIC T80 Db IP67*

Zones 1, 21, 2, 22 Gas and Dust

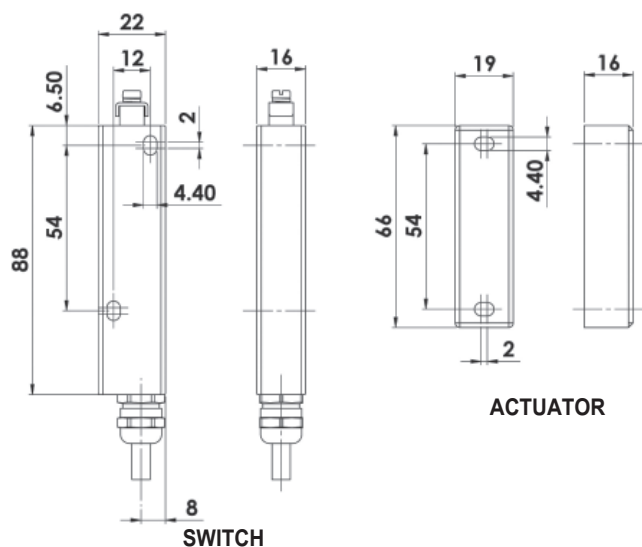

ACTUATOR

SWITCH

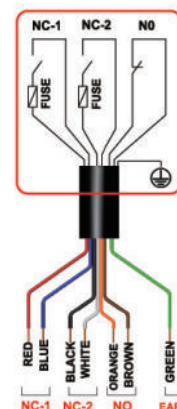

SALES NUMBER	TYPE ZONES 1,21,2,22	BODY HOUSING	CABLE LENGTH 6mm OD	CIRCUITS	ELECTRICAL RATING NORMALLY CLOSED CIRCUITS (Actuator Present) NC	ELECTRICAL RATING NORMALLY OPEN CIRCUITS (Actuator Present) NO
902103	CM2-Ex	S/Steel	5M	1NC	230Vac/24Vdc 1A Max.	
902104	CM2-Ex	S/Steel	10M	1NC	INTERNALLY FUSED	
902105	CM2-Ex	S/Steel	5M	2NC 1NO	230Vac/24Vdc 0.6A Max.	230Vac/24Vdc
902106	CM2-Ex	S/Steel	10M	2NC 1NO	INTERNALLY FUSED	200mA. Max.

*Product is fully encapsulated which is considered to provide ingress protection to at least IP67.

Explosion Proof Non Contact Safety Interlock Switches



CM3-Ex STAINLESS STEEL 316





II 2G Ex mb IIC T6 Gb



II 2D Ex mb IIIC T80 Db IP67*

Zones 1, 21, 2, 22 Gas and Dust

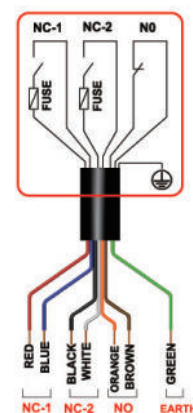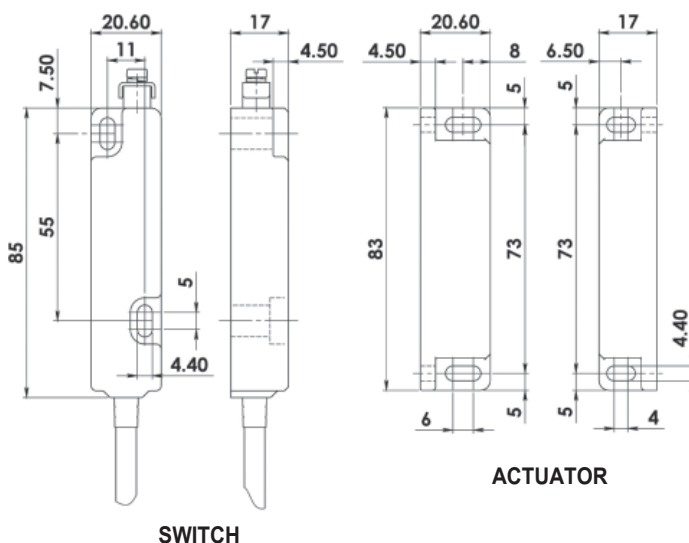

SALES NUMBER	TYPE ZONES 1,21,2,22	BODY HOUSING	CABLE LENGTH 6mm OD	CIRCUITS	ELECTRICAL RATING NORMALLY CLOSED CIRCUITS (Actuator Present) NC INTERNALLY FUSED	ELECTRICAL RATING NORMALLY OPEN CIRCUITS (Actuator Present) NO
903101	CM3-Ex	S/Steel	5M	2NC 1NO	230Vac/24Vdc 0.6A Max.	230Vac/24Vdc
903102	CM3-Ex	S/Steel	10M	2NC 1NO		200mA. Max.